Chioccarello

Viale dell' Industria 4, 36036 Torrebelvicino (Vicenza) Italy
Tel. / Fax. + 39 0445 661651 +39 0445 1654761
www.chioccarello.it - info@chioccarello.it
P.I. e C.F. 03845630247

Disco

Disco Coex

MADE in ITALY

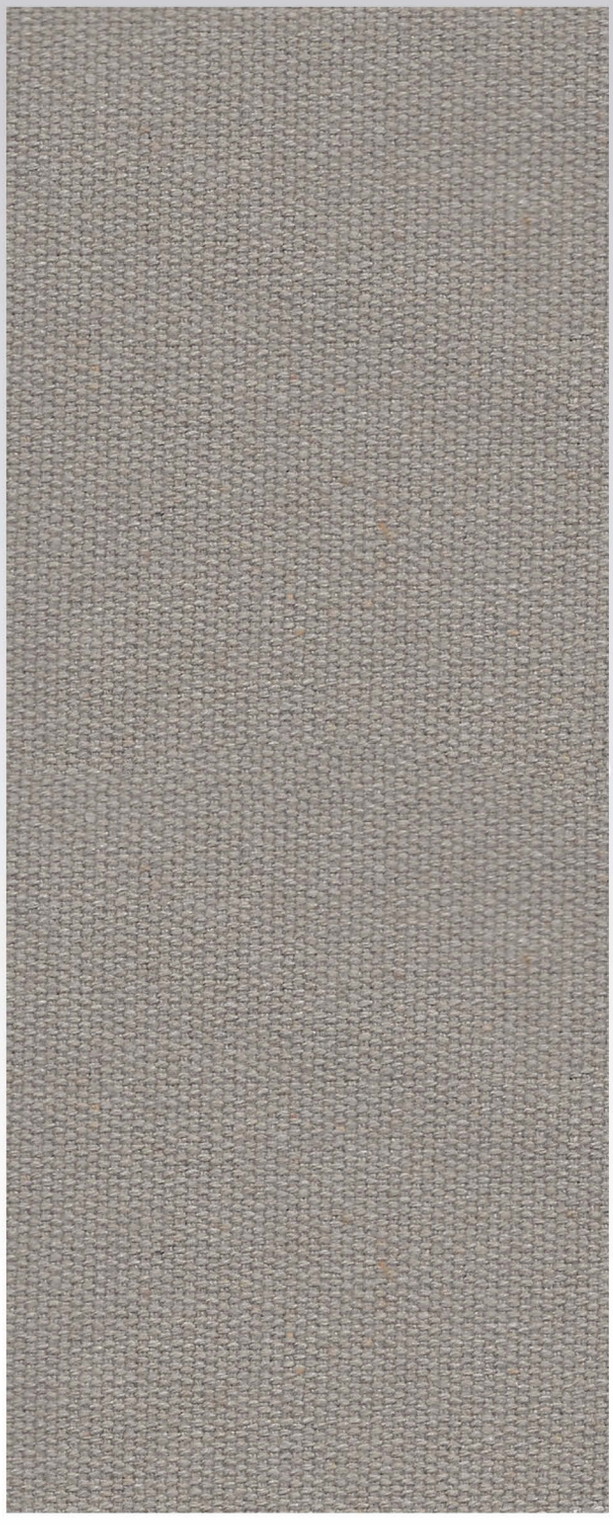

DISCO

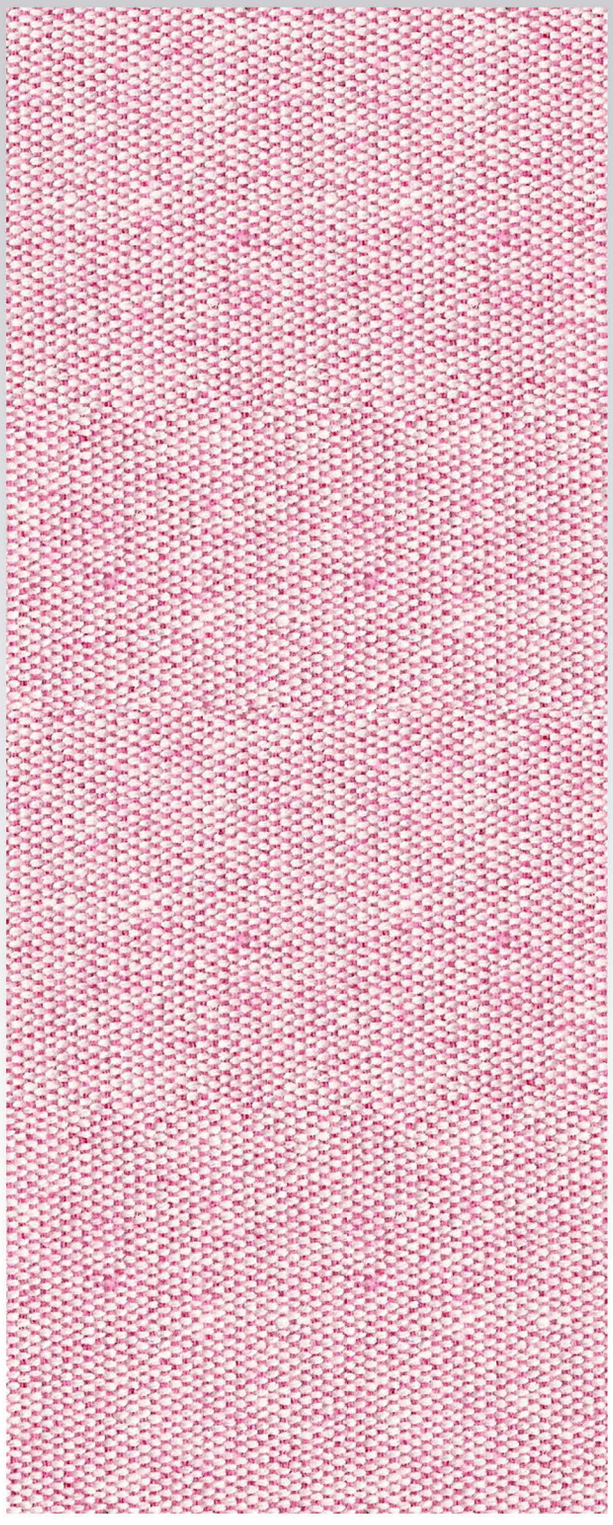

DISCO COEX

MADE in ITALY

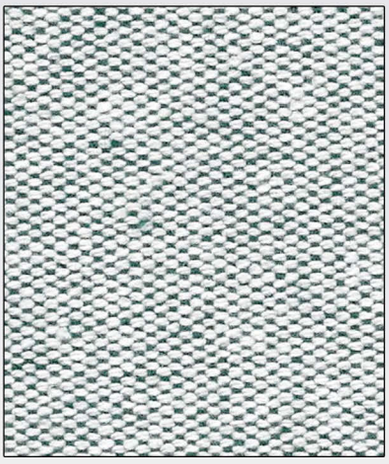

46

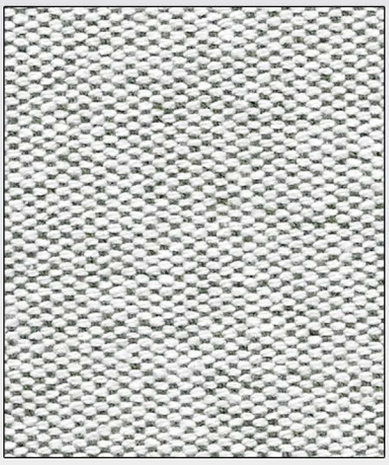

51

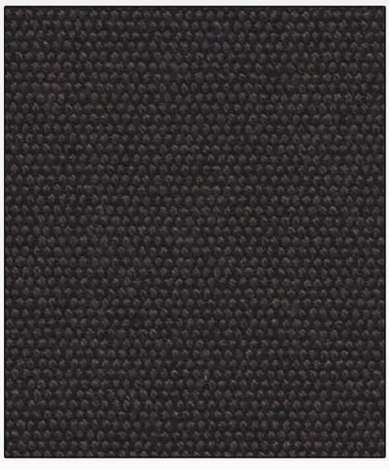

01

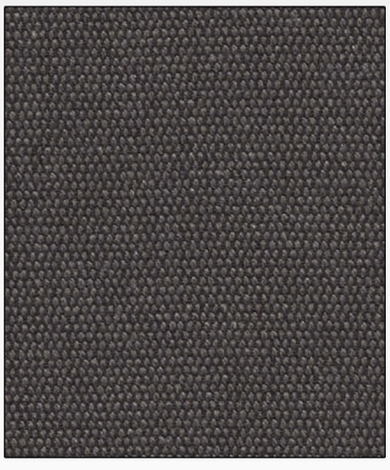

30

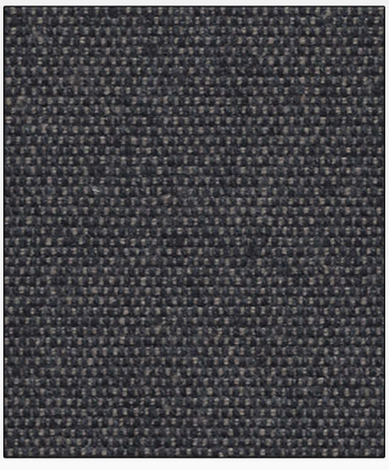

09

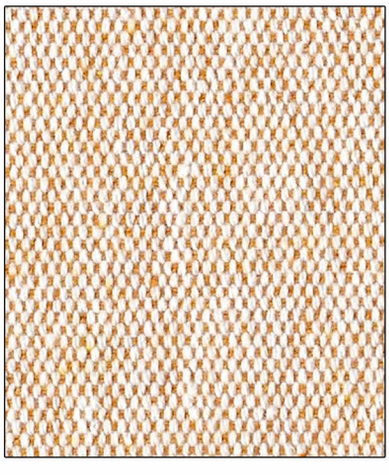

50

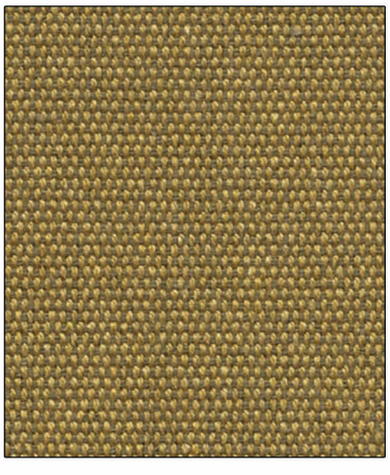

31

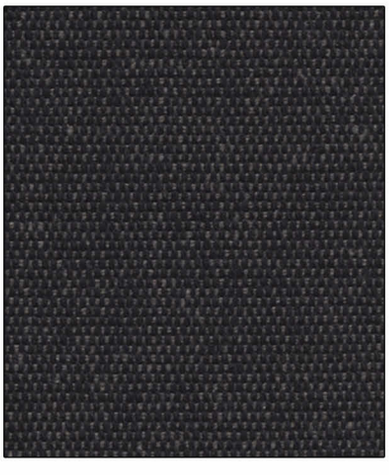

10

MADE in ITALY

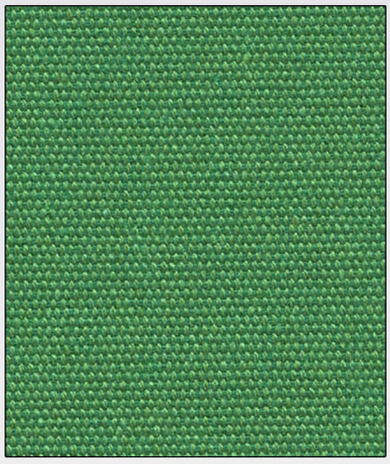

41

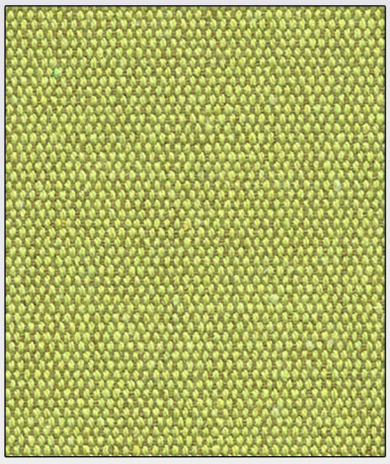

40

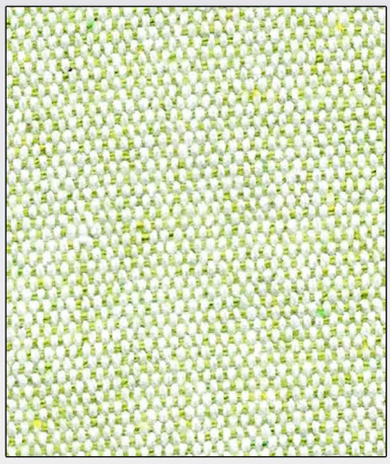

52

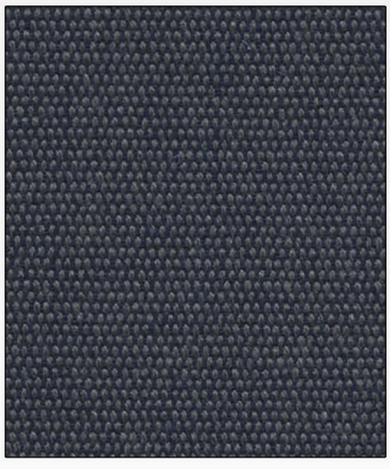

27

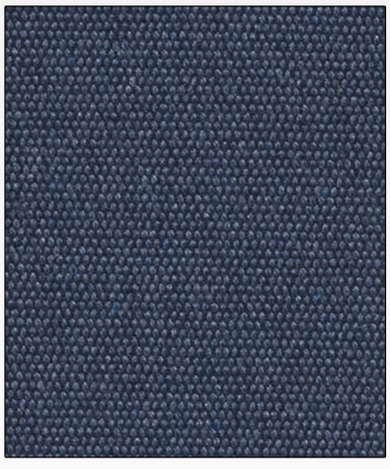

12

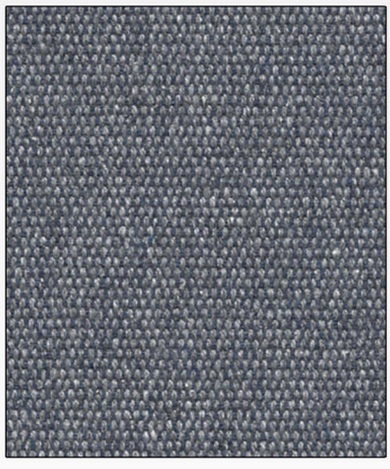

33

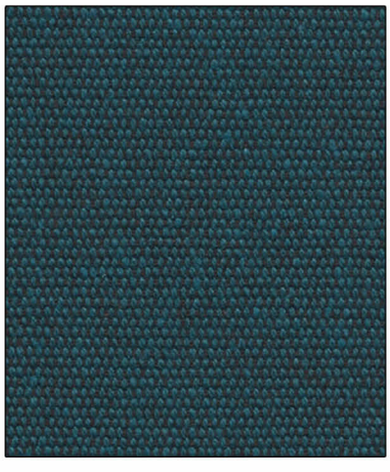

28

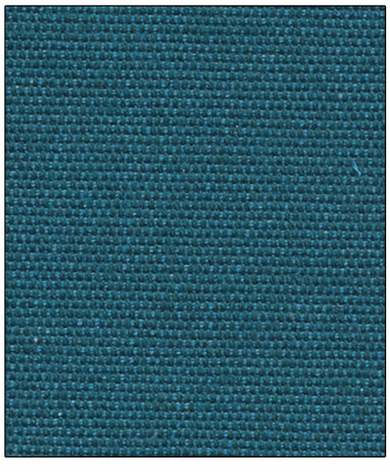

35

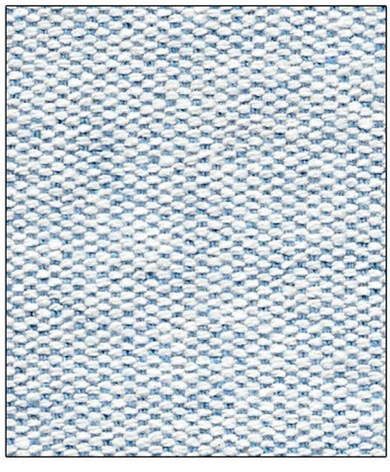

47

MADE in ITALY

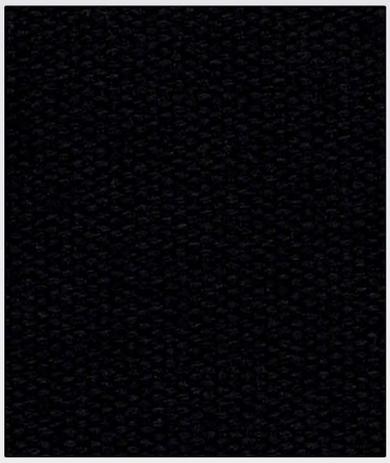

11

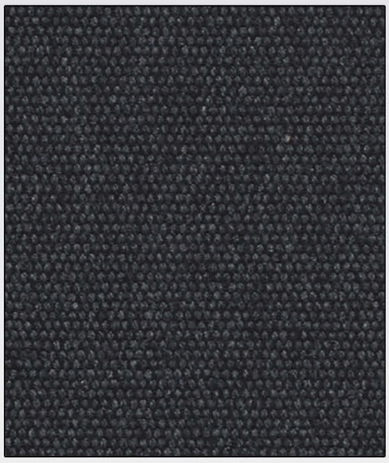

26

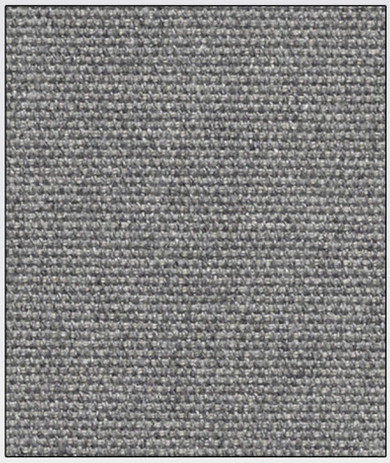

08

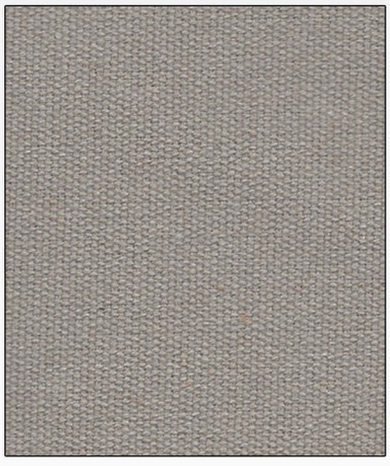

23

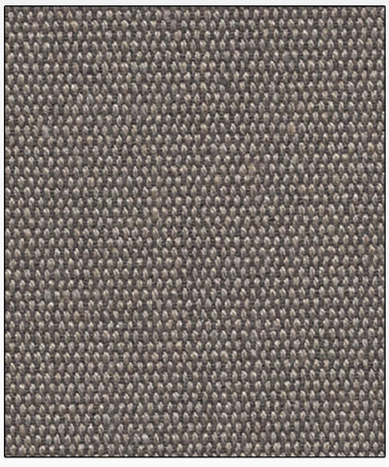

07

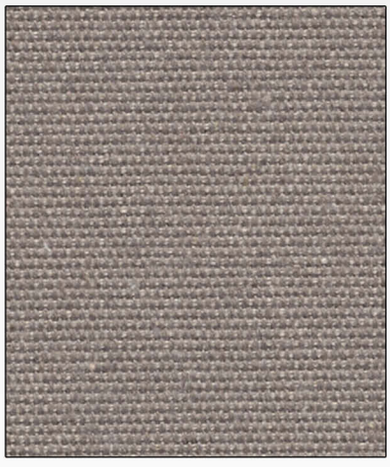

06

53

13

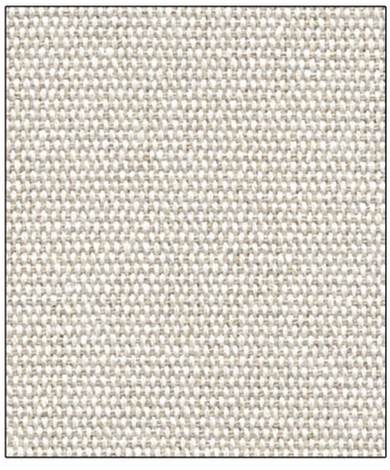

05

MADE in ITALY

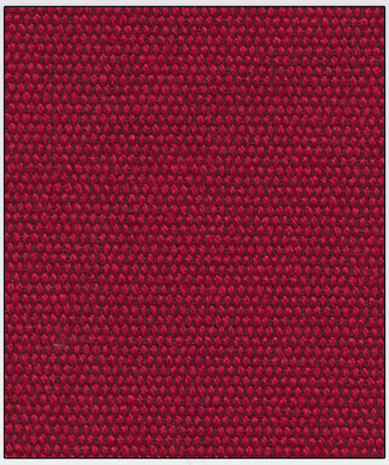

24

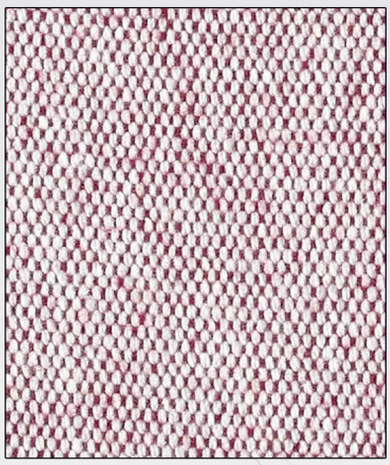

48

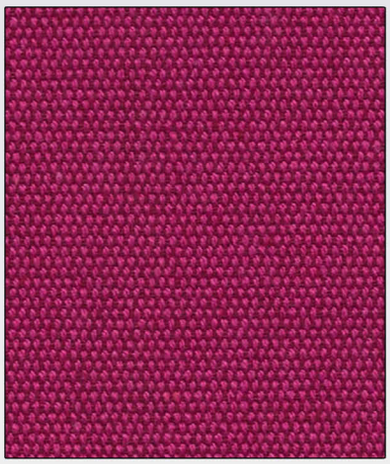

43

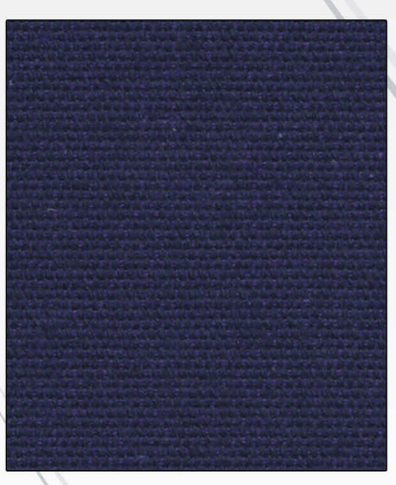

38

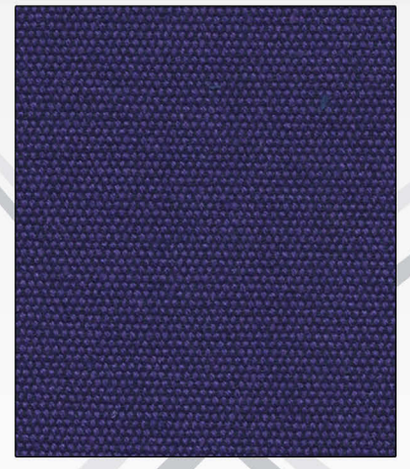

37

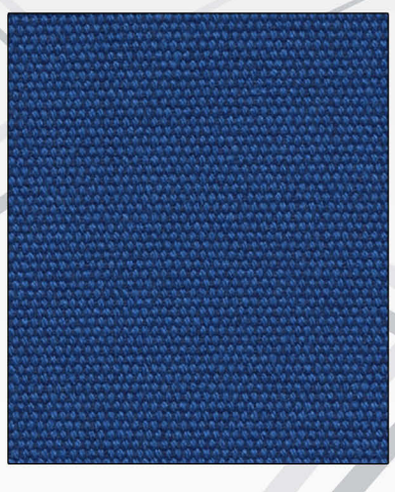

36

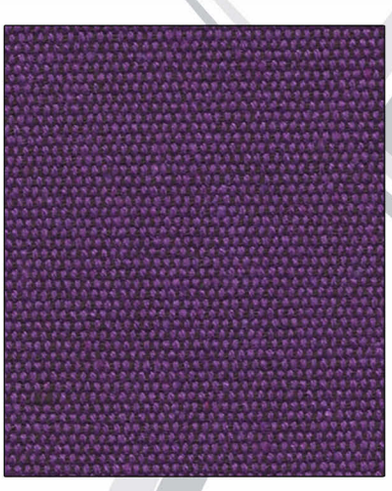

17

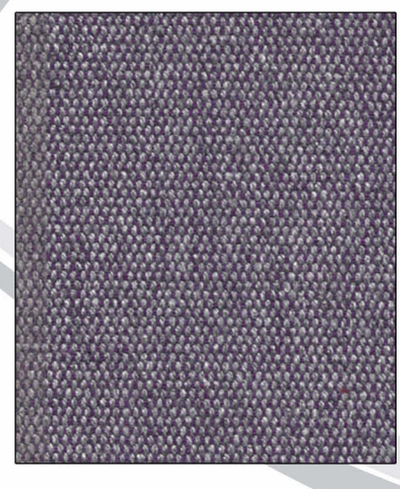

32

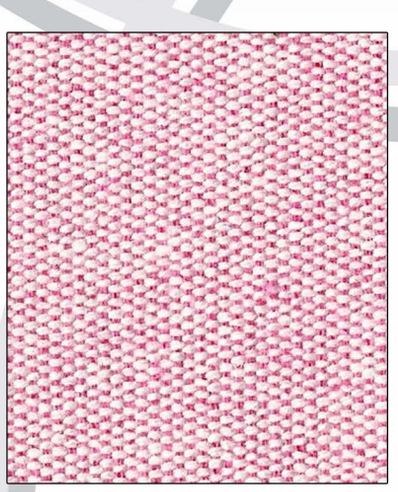

49

MADE in ITALY

DISCO

I	UK	D	F	E
Composizione 70% cotone 20 % acrilico 5% viscosa 5% lino	**Composition** 70% cotton 20% acrylic 5% viscose 5% linen	**Zusammensetzung** 70% baumwolle 20% polyacryl 5% viscose 5% leinen	**Materiale** 70% coton 20% acrylique 5% viscose 5% lin	**Composición** 70% algodón 20% acrílico 5% viscosa 5% lino
Peso 430 g/m² ± 15	**Weight** 430 g/m² ± 15	**Gewicht** 430 g/m² ± 15	**Poids** 430 g/m² ± 15	**Peso** 430 g/m² ± 15
Altezza 150 cm ± 2	**Width** 150 cm ± 2	**Breite** 150 cm ± 2	**Langeur** 150 cm ± 2	**Ancho** 150 cm ± 2
Lunghezza Rotolo 30 mt ±10%	**Roll lenght** 30 mt ±10%	**Rolle länge** 30 mt ±10%	**Longueur rotulea** 30 mt ±10%	**Longitud rollo** 30 mt ±10%
Resistenza all'abrasione 50000 cicli	**Abrasion Resistance** 50000 cycles	**Scheuerfestigkeit** 50000 Scheuertouren	**Résistance à l'abrasion** 50000 tours	**Resistencia a la abrasión** 50000 ciclos
Resistenza alla luce (EN ISO 105-B02) 4/5	**Light Fastness (EN ISO 105-B02) 4/5**	**Lichtechtheit (EN ISO 105-B02) 4/5**	**Solidité à la lumière (EN ISO 105-B02) 4/5**	**Solidez a la luz (EN ISO 105-B02) 4/5**
Resistenza allo sfregamento (EN ISO 105-X12) Umido: 4 Secco: 5	**Fastness to Rubbing (EN ISO 105-X12) Wet: 4 Dry: 5**	**Reibechtheit (EN ISO 105-X12) Nass: 4 Trocken: 5**	**Solidité au frottement (EN ISO 105-X12) Mouillé: 4 Sec: 5**	**Solidez al rozamiento (EN ISO 105-X12) Húmedo: 4 Seco: 5**
Infiammabilità IMO	**Flammability IMO**	**Feursicherung IMO**	**Flammabilité IMO**	**Inflamabilidad IMO**
Assorbimento acustico: UNI EN ISO 354:2003	**Acoustic Absorption: UNI EN ISO 354:2003**	**Schallabsorptions: UNI EN ISO 354:2003**	**absorption acoustique: UNI EN ISO 354:2003**	**absorción acústica: UNI EN ISO 354:2003**
Solo su richiesta: idro-oleo repellente	**Only on request: water repellency and oil repellency**	**Nur Auf: anfrange: hydrophobe und oleophobe**	**Seulement sur demande: hydrofuge et oléofuge**	**Soló a petición: repelencia al agua y repelencia al aceite**
Colore Leggere differenze di colore fra una partita e l'altra sono da considerarsi normali	**Colour** Slight color differences between one lot and another have to be considered within commercial tolerance	**Farbabweichungen** Leichte farbunterschiede sind zwischen zwei Partien als normal su betracthten	**Coloris** Légères différences de couleur entre un lot et l'autre doivent être considerés comme étant normales	**Color** ligeras diferencias de color entre un lote y el otro son normales

Stock Service **Cut** Service

MADE in ITALY

DISCO COEX

I	UK	D	F	E
Composizione 70% cotone 20 % acrilico 5% viscosa 5% lino	**Composition** 70% cotton 20% acrylic 5% viscose 5% linen	**Zusammensetzung** 70% baumwolle 20% polyacryl 5% viscose 5% leinen	**Materiale** 70% coton 20% acrylique 5% viscose 5% lin	**Composición** 70% algodón 20% acrílico 5% viscosa 5% lino
Formaldeide 0%	**Formaldehyde 0%**	**Formaldehyd 0%**	**Formaldéhyde 0%**	**Formaldehído 0%**
Peso 430 g/m² ± 15	**Weight** 430 g/m² ± 15	**Gewicht** 430 g/m² ± 15	**Poids** 430 g/m² ± 15	**Peso** 430 g/m² ± 15
Altezza 150 cm ± 2	**Width** 150 cm ± 2	**Breite** 150 cm ± 2	**Langeur** 150 cm ± 2	**Ancho** 150 cm ± 2
Lunghezza Rotolo 25 mt ±10%	**Roll lenght** 25 mt ±10%	**Rolle länge** 25 mt ±10%	**Longueur rotulea** 25 mt ±10%	**Longitud rollo** 25 mt ±10%
Resistenza all'abrasione 50000 cicli	**Abrasion Resistance** 50000 cycles	**Scheuerfestigkeit** 50000 Scheuertouren	**Résistance à l'abrasion** 50000 tours	**Resistencia a la abrasión** 50000 ciclos
Resistenza alla luce (EN ISO 105-B02) 4/5	**Light Fastness (EN ISO 105-B02) 4/5**	**Lichtechtheit (EN ISO 105-B02) 4/5**	**Solidité à la lumière (EN ISO 105-B02) 4/5**	**Solidez a la luz (EN ISO 105-B02) 4/5**
Resistenza allo sfregamento (EN ISO 105-X12) Umido: 4 Secco: 5	**Fastness to Rubbing (EN ISO 105-X12) Wet: 4 Dry: 5**	**Reibechtheit (EN ISO 105-X12) Nass: 4 Trocken: 5**	**Solidité au frottement (EN ISO 105-X12) Mouillé: 4 Sec: 5**	**Solidez al rozamiento (EN ISO 105-X12) Húmedo: 4 Seco: 5**
Infiammabilità IMO 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013	**Flammability IMO 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013**	**Feursicherung IMO 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013**	**Flammabilité IMO 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013**	**Inflamabilidad IMO 1 IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013**
Assorbimento acustico: UNI EN ISO 354:2003	**Acoustic Absorption: UNI EN ISO 354:2003**	**Schallabsorptions: UNI EN ISO 354:2003**	**absorption acoustique: UNI EN ISO 354:2003**	**absorción acústica: UNI EN ISO 354:2003**
Colore Leggere differenze di colore fra una partita e l'altra sono da considerarsi normali	**Colour** Slight color differences between one lot and another have to be considered within commercial tolerance	**Farbabweichungen** Leichte farbunterschiede sind zwischen zwei Partien als normal su betracthten	**Coloris** Légères différences de couleur entre un lot et l'autre doivent être considerés comme étant normales	**Color** ligeras diferencias de color entre un lote y el otro son normales

COEX® è l'unica tecnologia brevettata 100% naturale, basata sulla molecola della cellulosa, che rende totalmente ignifuga qualsiasi fibra di origine vegetale

COEX® is a fireproof patented technology, 100% natural fiber, based on cellulose molecula.

COEX® NATURALLY FIREPROOF

Stock Service **Cut** Service

30

GUARANTEE 5 YEARS

MADE in ITALY

Mediatrend.it